
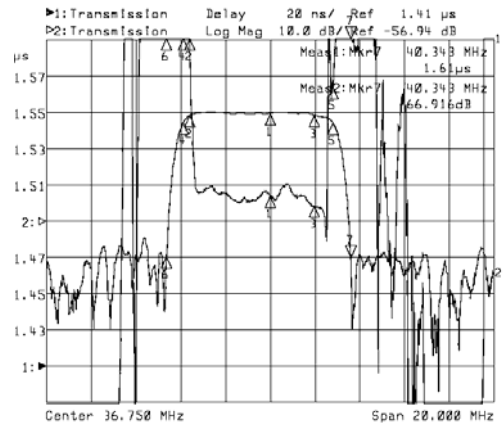




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	36.10	36.15	36.20
Insertion Loss at F ₀	dB		27.5	28.0
@33.150MHz	dB	-0.8	-1.0	
@39.65MHz	dB	-4.0	-4.2	
@40.40MHz	dB	-38	-45	
@31.90MHz	dB	-35	-42	
Passband Variation	dB		0.6	0.8
Group Delay Variation	nsec		40	60
Absolute Delay	usec		1.6	
Ultimate Rejection	dB	35	38	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

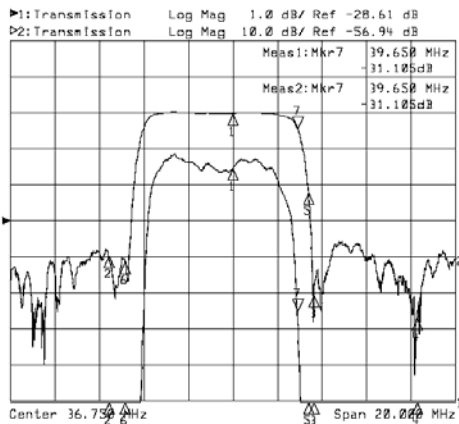

3. Package

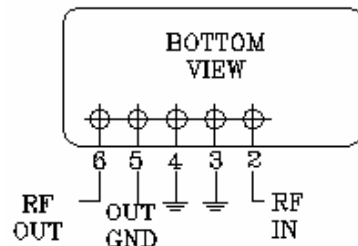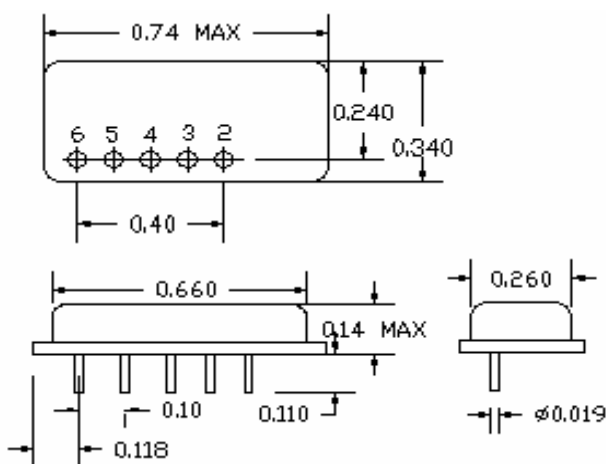

No Matching
Required
Source/Load
Impedance=50ohm
Package Style XP

4. Marking

WB0585